



SANKYO REELS, INC.

279-5 Sanno-Cho, Inage-Ku, Chiba-shi

Chiba 263-0002 Japan

Phone: +81-43-421-5551

Fax : +81-43-421-5553

info@triensasiasia.com

Website : <https://www.triens.eu/>

CATALOGUE PDF




WEBSITE



SANKYO REELS, INC.

INTERNATIONAL CATALOGUE

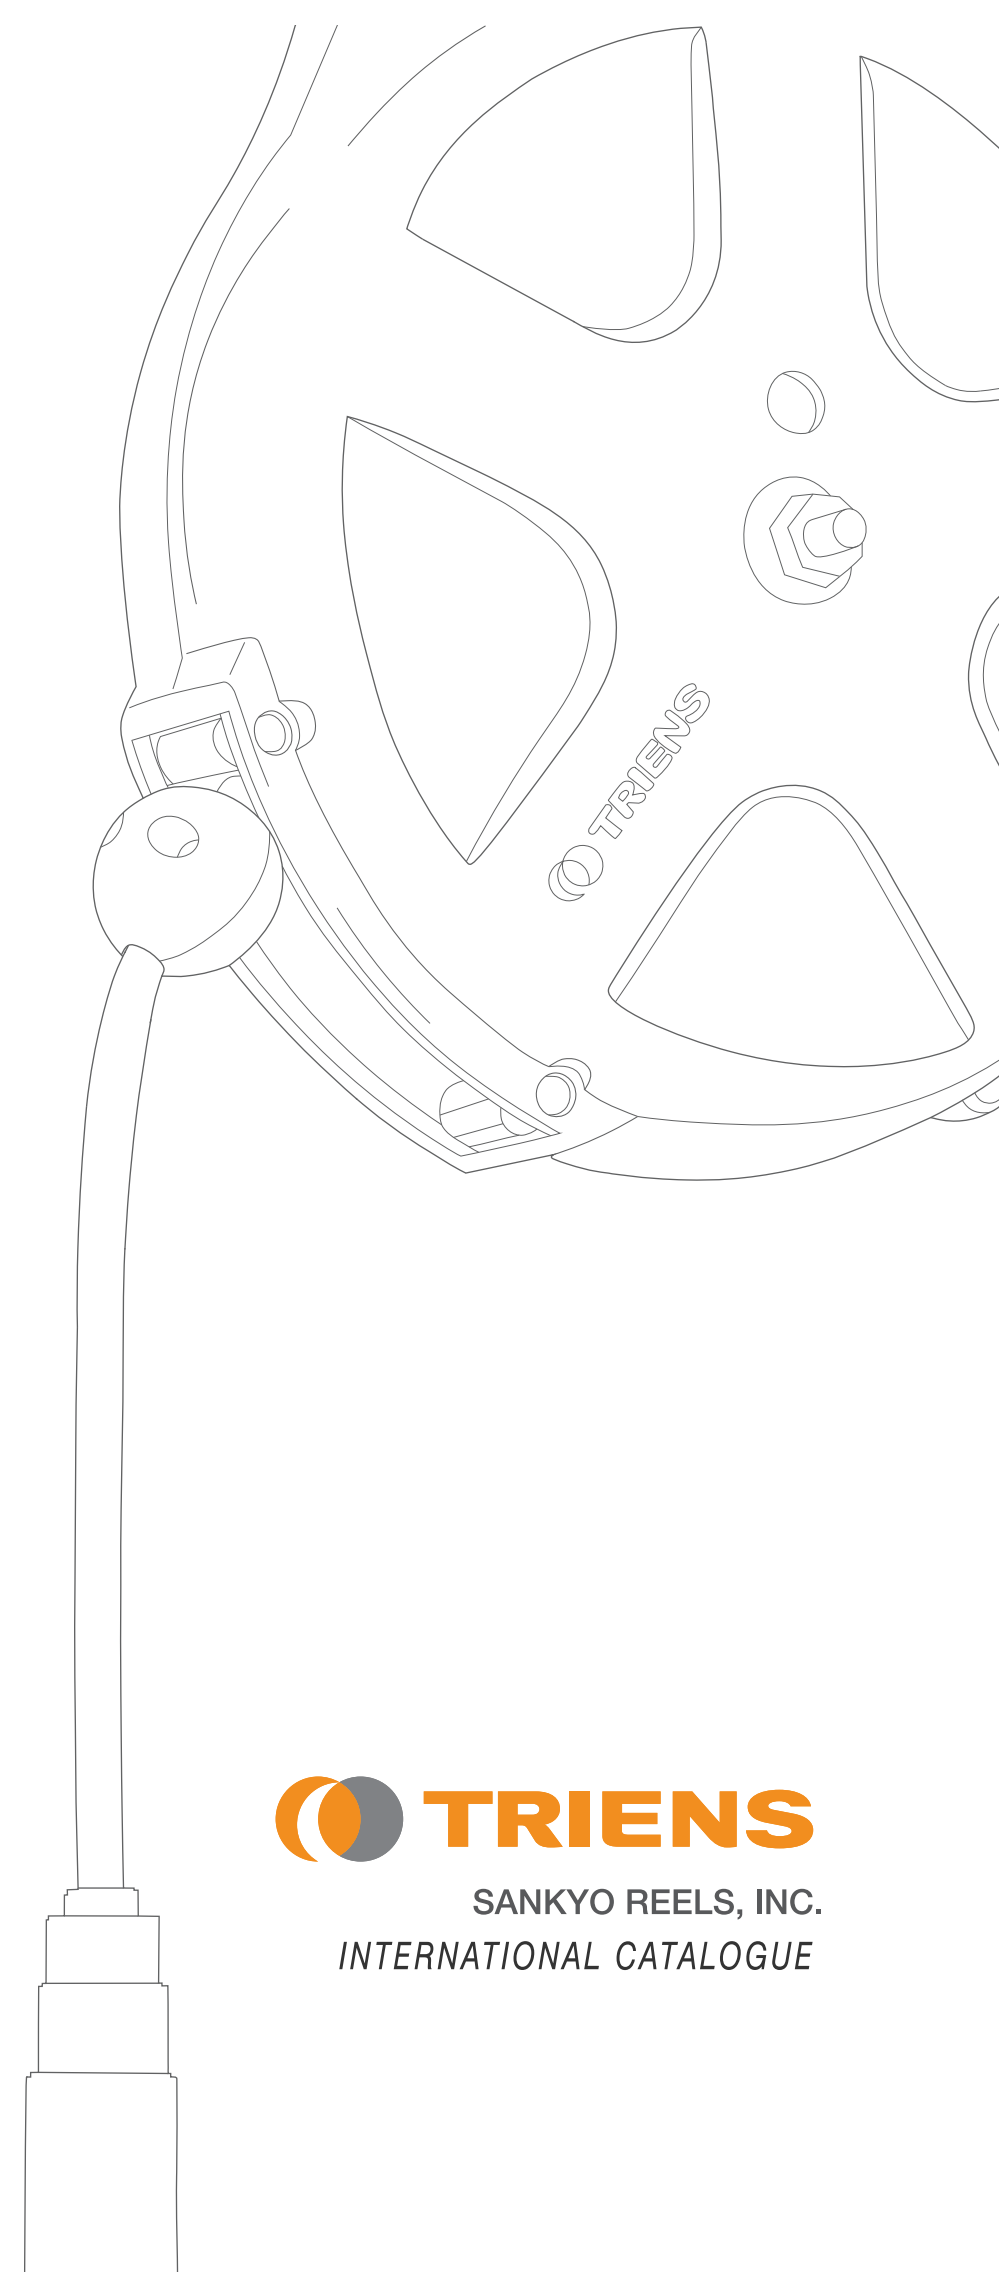

WIND the GLOBE

Sankyo Reels, Inc. was founded in 1968, and its headquarter is located in Chiba city, Japan. We are proud that our products keep top share in the automotive industry, and its high level quality is widely recognized. Our lineup includes an abundant variety of highly functional and well designed reels, which meet every customers' demands of sizes and purposes.

In recent years, along with establishing our facilities in the US in 1997, China in 2003, Belgium in 2008 and Thailand in 2014, we started the TRIENS brand in June 2007 seeking to create a global brand for reels built on our company's reliability, advancements and refinements at the forefront. We will make great leaps into the global market with our headquarters in Japan.

Triens has won several design awards for our innovative and modern styled reels. We constantly improve the form and function of our products. We will continue to treat all needs with importance, supply products that meet users' demands, and make great steps forward.

At TRIENS, we are committed to bringing the finest, most advanced and most innovative products to our valued customers all over the world.



“TRIENS” represents “Sankyo”, comes from the Latin “tri” (three) and “consensio” (accordance).

The name encompasses the meaning of an engineering group that is always trying their best, and working to become professionals who never compromise.


These thoughts towards each of us are included in the name of TRIENS.

COMPANY PROFILE

SANKYO REELS.,INC.

Location of Head quarter : 279-5 Sanno-cho, Inage-ku, Chiba-shi
Chiba 263-0002 Japan
Phone : +81-43-421-5551
Fax : +81-43-421-5553
<http://www.triensasia.com>
e-mail: international@triens.jp

Foundation : June 1968
Capital : JPY 36,000,000 ¥Whole Groupe 280,000,000¥
Products : Air Hose Reel ¥ Outlet Cord Reel¥ Water Reel¥ and other reels
Manufacture and sales of Automotive tools
Representative : CEO Kentaro MIKI

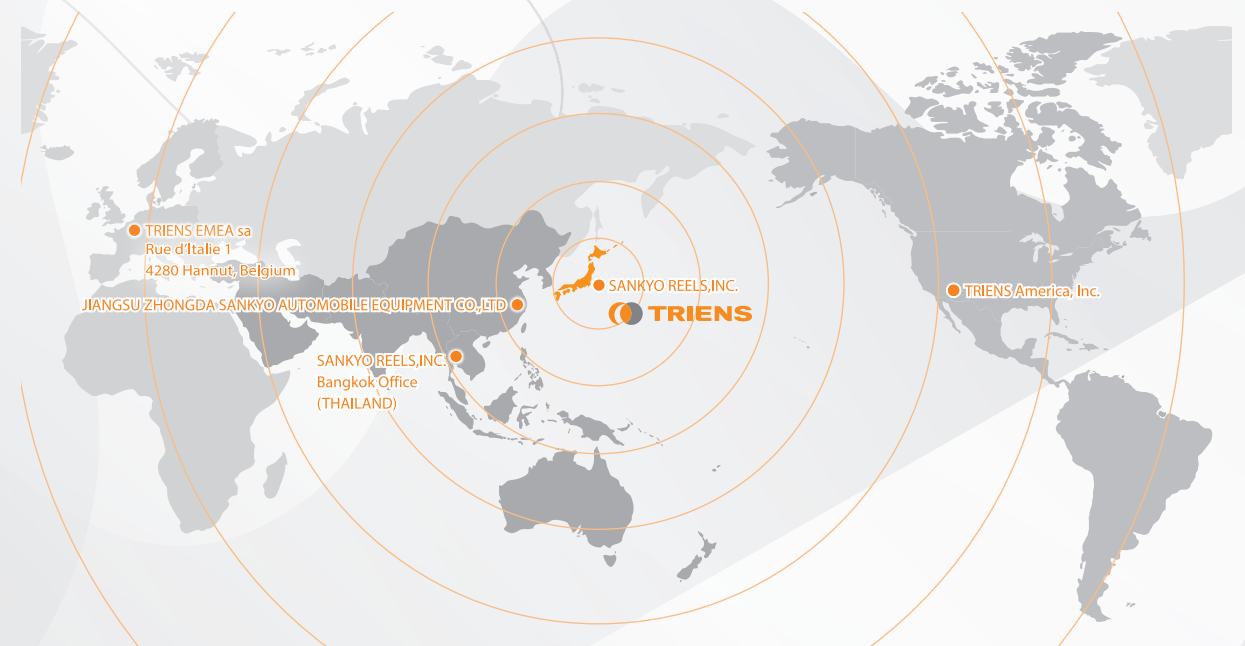

Yancheng Zhongda Sankyo Automobile Equipment Co., Ltd.
Building 1, No.6 Xinyin Rd, Bufeng Town,
Economic and Technological Development Zone,
Yancheng City, Jiangsu province, China
P.C.224000
TEL. +86-515-88286100
FAX. +86-515-88285432
<http://www.triens.cn/>



TRIENS America Inc.
2420 W. 1st Street #59
Tempe, AZ 85281
TEL. +1-480-219-6931
FAX. +1-480-219-7294
<http://www.triens.us/>



SANKYO REELS, INC (Bangkok Office)
Room C, Jasmine Bldg. 24th Floor.
Soi Prasarnmitr (Sukhumvit 23),
Sukhumvit RD, North klongtoey, Wattana,
BANGKOK 10110 THAILAND
TEL. +66(0)2-612-7329
FAX. +66(0)2-612-7399
<http://www.triensasia.com>



TRIENS EMEA sa
Rue d'Italie 1 4280 Hannut, Belgium
TEL. +32-1-963-60-36
<http://www.triens.eu/>

PRODUCTS


REEL PRODUCT



S-Series

Air Hose Reel

P.05

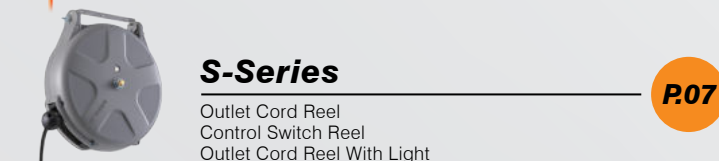

S-Series

Outlet Cord Reel
Control Switch Reel
Outlet Cord Reel With Light

P.07



S-Series

Water Reel

P.08



W-Series

Air Hose Reel
Outlet Cord Reel
Control Switch Reel

P.09



Unit reel

Air Hose Reel
Cable Reel


P.10



G-Series

Air Hose Reel
Water Reel
Oil / Grease Reel


P.11

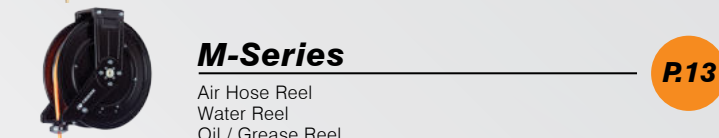

M-Series

Air Hose Reel
Water Reel
Oil / Grease Reel

P.13

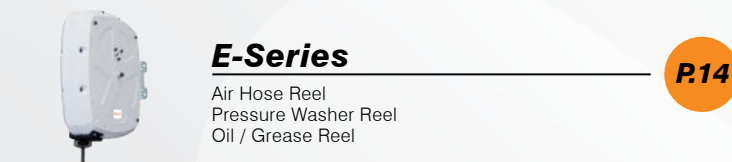

E-Series

Air Hose Reel
Pressure Washer Reel
Oil / Grease Reel


P.14



O-Series

Welding Reel


P.15

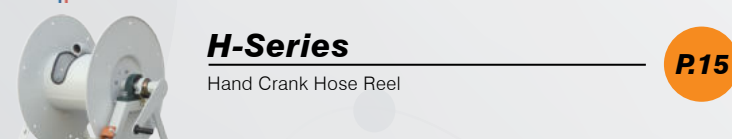

H-Series

Hand Crank Hose Reel


P.15

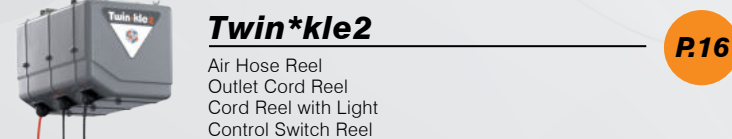

Twin*kle2

Air Hose Reel
Outlet Cord Reel
Cord Reel with Light
Control Switch Reel
Water Reel

P.16

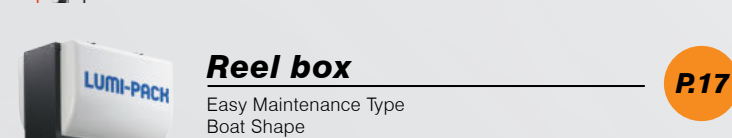

Reel box

Easy Maintenance Type
Boat Shape
Round Shape


P.17



SBB-Series

SBB-SS
SBB-S
SBB-L


P.18

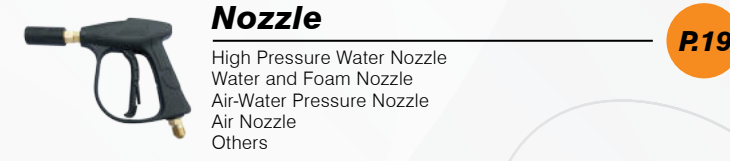

Nozzle

High Pressure Water Nozzle
Water and Foam Nozzle
Air-Water Pressure Nozzle
Air Nozzle
Others


P.19

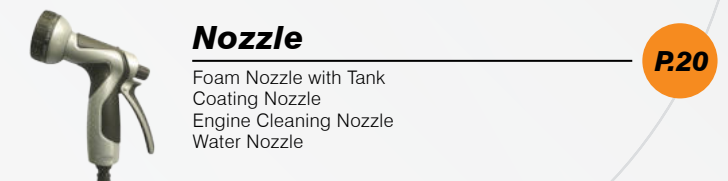

Nozzle

Foam Nozzle with Tank
Coating Nozzle
Engine Cleaning Nozzle
Water Nozzle

P.20

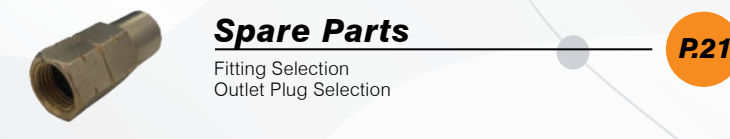

Spare Parts

Fitting Selection
Outlet Plug Selection

P.21



Spare Parts

Hose Selection


P.21



E-Meter

E-Meter
E-Preset

P.22

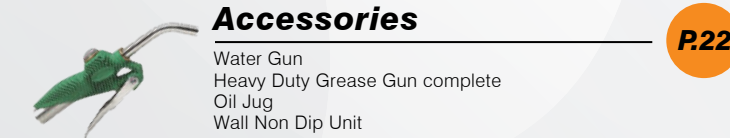

Accessories

Water Gun
Heavy Duty Grease Gun complete
Oil Jug
Wall Non Dip Unit

P.22



Trolley

Hand Lever Oil Pump
Drum Trolley


P.23



Oil Pump

Pneumatic Oil Pump Heavy duty
Pneumatic Oil Pump Stainless Steel
Pneumatic Pump


P.23

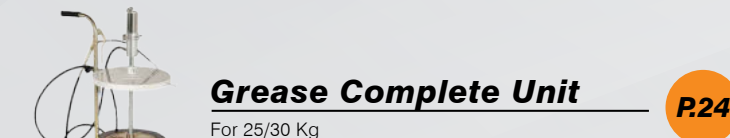

Grease Complete Unit

For 25/30 Kg
For 55/60 Kg
For 180/200 Kg


P.24

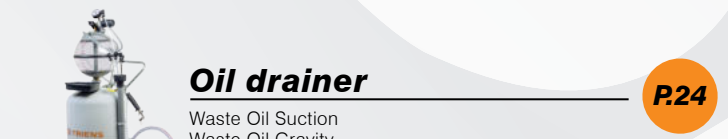

Oil drainer

Waste Oil Suction
Waste Oil Gravity
Waste Oil Suction and Gravity

P.24

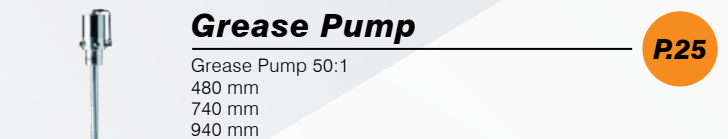

Grease Pump

Grease Pump 50:1
480 mm
740 mm
940 mm

P.25



Cover & Plate

Cover
Follower Plate


P.25



Diaphragm Pump

Diaphragm Pump

P.25

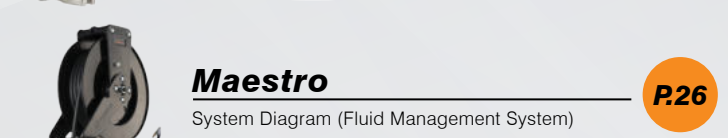

Maestro

System Diagram (Fluid Management System)

P.26

CAR WASH equipment

SPARE PARTS

LUBRICATION equipment

● S-SERIES ●


Reliability and Results.TRIENS'new redesigned standard series

S-SERIES reels are our No.1 selling reel for over 45 years.Light weight, easy to handle and convenient for restricted indoor spaces. High impact cover protects all working parts from contaminants, such as dust or dirt, and prevents hose binding and overlap. The slide-in mounting bracket allows for quick and easy installation.

- *Corrosion resistant solid brass axle.
- *Reel comes complete with inlet hose or cord, and mounting bracket.




Size Comparison

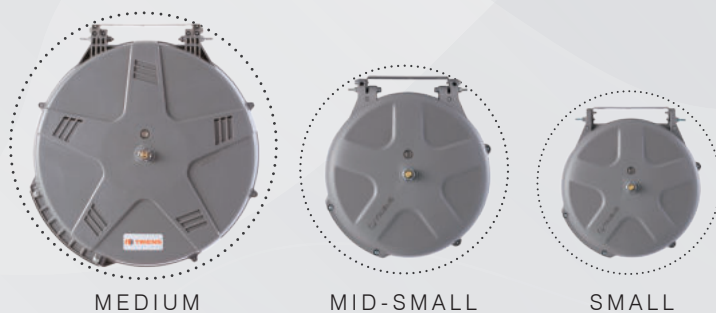

01 Improved support strength
Strengthened bracket support arms more than twice as previous model.




02 Equipped with SUS protector
Stainless steel protector has been added at hose outlet to extend life of outside casing




03 Easy hose replacement
Easy Coupling, at the connection between outlet hose and the reel, allows for easy hose replacement.

Ceiling or Wall mount

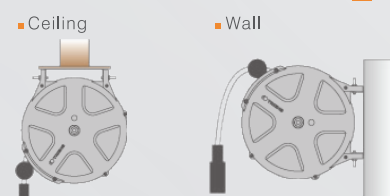

Dimensions

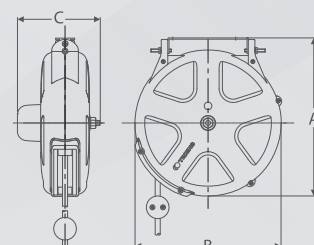

AIR HOSE REELS (SMALL)




Air Hose Reels
SHS-210Z
6.5mm 10m
■ High-quality polyurethane hose.
■ Easy couplings are equipped.

Air Hose Reels
SHS-213A
6.5mm 13m

SHS-310A
8.0mm 10m

NEW End fitting spring and cover (OPTIONAL)

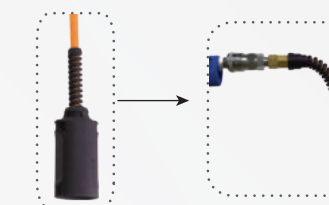

- Kink-free spring for better hose life.
- ※Only available for 6.5mm PU hose.

More detail:



Model	Outlet hose					Inlet hose		Size mm(inch)			Weight Kg(lb)
	Material	Fitting	ID inch(mm)	m(ft)	bar(psi)	Fitting	m(ft)	A	B	C	
SHS-210Z	PU	1/4	1/4(6.5)	10(35)	14(200)	1/4	0.8(2.6)	314(12.4)	290(11.5)	152(6.0)	3.5(7.7)
SHS-213A	PU	1/4	1/4(6.5)	13(42)	14(200)	1/4	0.8(2.6)				
SHS-310A	PU	3/8	5/16(8.0)	10(35)	14(200)	3/8	0.8(2.6)				

※Comes with mounting base set.

AIR HOSE REELS (MID-SMALL)



Air Hose Reel
SHM-215
6.5mm 15m

Air Hose Reel
SHM-313
8.0mm 13m
■ High-quality polyurethane hose.
■ Easy couplings are equipped.

AIR HOSE REELS (MEDIUM)



Air Hose Reel
SHR-20Z
6.5mm 20m

Air Hose Reel
SHR-35Z
8.0mm 15m

Model	Outlet hose					Inlet hose		Size mm(inch)			Weight Kg(lb)
	Material	Fitting	ID inch(mm)	m(ft)	bar(psi)	Fitting	m(ft)	A	B	C	
SHM-215	PU	1/4	1/4(6.5)	15(50)	14(200)	1/4	0.8(2.6)	367(14.5)	337(13.3)	159(6.3)	4.2(9.2)
SHM-313	PU	3/8	5/16(8.0)	13(42)	14(200)	3/8	0.8(2.6)				
SHR-20Z	PU	1/4	1/4(6.5)	20(65)	14(200)	1/4	0.8(2.6)	408(16.1)	384(15.2)	173(6.9)	6.7(14.7)
SHR-35Z	PU	3/8	5/16(8.0)	15(50)	14(200)	3/8	0.8(2.6)				

※Comes with mounting base set.

OPTIONAL COLOUR

Color variation available only for small reels

Standard colours



Special customize colours



OUTLET CORD REELS(SMALL)



Outlet Cord Reel
SCS-310
100V 220V 10m

OUTLET CORD REELS(MEDIUM)



Outlet Cord Reel
SLR-20N
100V 220V 20m

Model	Outlet cable				Outlet cable			Inlet cable		Weight kg (lb)	Size mm(inch)		
	Cable standard	Plug type	wire(s)	mm ² (AWG)	m(ft)	V	A	thermostat	m		A	B	C
SCS-310	PSE	A/A3	3	1.25	10(35)	125/250	6	○	0.8(2.6)	4.1(9.0)	314(12.4)	290(11.5)	164(6.4)
	VDE	E/EF	3	1.5									
	CCC	A/C/ACI	3	1.5									
	SJTOW	B	3	1.25 (16)									
SCS-313A	PSE	A/A3	3	1.25	13(40)	125/250	6	○	0.8(2.6)	4.5(9.9)	314(12.4)	290(11.5)	164(6.4)
	VDE	E/EF	3	1.5									
	CCC	A/C/ACI	3	1.5									
	SJTOW	B	3	1.25 (16)									
SLR-20N	PSE	A/A3	3	1.25	20(65)	125/250	6	○	0.8(2.6)	8.5(18.7)	408(16)	384(15.1)	183(7.2)
	VDE	E/EF	3	1.5									
	CCC	A/C/ACI	3	1.5									
	CCC	A/C/ACI	3	1.5									



SAFETY THERMOSTAT

DETECT THE HEAT

SHUT OFF THE CURRENT

RESTORE AUTOMATICALLY

THERMOSTAT SENSOR

prevents over heating of the reel.
It shuts off the current when
the temperature reached around
70°C and restores automatically
when the temperature goes down.

CONTROL SWITCH REELS(SMALL)



Control Switch Reel
SPS-308
3 wires 8m



Control Switch Reel
SPS-408
4 wires 8m



Control Switch Reel
SS6-410
SS10-410
4 wires 10m

Model	Outlet cable				Outlet cable			Inlet cable		Weight kg (lb)	Size mm(inch)		
	Cable standard	Plug type	wire(s)	mm ² (AWG)	m(ft)	V	A	thermostat	m		A	B	C
SPS-308	PSE/VDE/CCC	Soldered Wire	3	1.25	8(25)	125/250	6	-	0.8(2.6)	3.6(7.9)	314(12.4)	290(11.5)	164(6.4)
SPS-408	PSE/VDE/CCC	Soldered Wire	4	1.5	8(25)	125/250	6	-	0.8(2.6)	4.2(9.2)	314(12.4)	290(11.5)	164(6.4)
SS6-410	CCC	Soldered Wire	4	1.5	10(35)	380	6	-	0.8(2.6)	4.1(9.0)	314(12.4)	290(11.5)	152(5.9)
SS10-410	CCC	Soldered Wire	4	2.5	10(35)	380	10	-	0.8(2.6)	4.9(10.8)	314(12.4)	290(11.5)	152(5.9)

OUTLET CORD REELS WITH LIGHT



Captain Light Reel
SCS-310C
100V 220V 10m
• Outlet Cord Reel with CL-18 (18W hand light.)



CL-18

Captain Light Reel
SCS-310D
100V 220V 10m
• Outlet Cord Reel with CL-18 (18W LED hand light.)

Replacement
fluorescent lamp unit
(for CL-18)
PLL-18W



Captain Light Reel
SLR-20CN
100V 220V 20m
• Outlet Cord Reel with CL-18 (18W hand light.)



LED-18

Captain Light Reel
SLR-20DN
100V 220V 20m
• Outlet Cord Reel with CL-18LED (18W LED hand light.)

Replacement LED
lamp unit
(for CL-18LED)
LED-18



Model	Outlet cable				Outlet cable			Outlet cable		Weight kg (lb)	Size mm(inch)		
	Cable standard	Plug type	wire(s)	mm ² (AWG)	m(ft)	V	A	thermostat	m(ft)		A	B	C
SCS-310C	PSE	Hand light CL-18	3	1.25	10(35)	125/250	6	○	0.8(2.6)	4.5(9.9)	314(12.4)	290(11.5)	164(6.4)
	VDE			1.5									
	CCC			1.5									
	SJTOW			1.25									
SCS-310D	PSE	Hand light CL-18LED	3	1.25	10(35)	125/250	6	○	0.8(2.6)	4.5(9.9)	314(12.4)	290(11.5)	164(6.4)
	VDE			1.5									
	CCC			1.5									
	SJTOW			1.25									
SCS-313C	PSE	Hand light CL-18	3	1.25	13(40)	125/250	6	○	0.8(2.6)	4.9(10.8)	314(12.4)	290(11.5)	164(6.4)
	VDE			1.5									
	CCC			1.5									
	SJTOW			1.25									
SCS-313D	PSE	Hand light CL-18LED	3	1.25	13(40)	125/250	6	○	0.8(2.6)	4.9(10.8)	314(12.4)	290(11.5)	164(6.4)
	VDE			1.5									
	CCC			1.5									
	SJTOW			1.25									
SLR-20CN	PSE	Hand light CL-18	3	1.25	20(65)	125/250	6	○	0.8(2.6)	8.9(19.6)	408(16.0)	384(15.1)	183(7.2)
	VDE			1.5									
	CCC			1.5									
SLR-20DN	PSE	Hand light CL-18LED	3	1.25	20(65)	125/250	6	○	0.8(2.6)	8.9(19.6)	408(16.0)	384(15.1)	183(7.2)
	VDE			1.5									
	CCC			1.5									

WATER REELS (SMALL & MEDIUM)



Water Reel
SWS-210A
60 mm 10m
• Reliable PVC hose



Water Reel
SWR-310
80 mm 10m
• Reliable PVC hose

Model	Outlet hose					Inlet hose		Size mm(inch)			Weight kg (lb)
	Material	Fitting	ID inch(mm)	m(ft)	bar(psi)	Fitting	m(ft)	A	B	C	
SWS-210A	PVC	1/4	1/4(6.5)	10(35)	20(300)	1/4	1.0(3.2)	314(12.4)	290(11.5)	152(5.9)	3.7(8.1)
SWR-310	PVC	3/8	3/8(9.5)	10(35)	20(300)	3/8	1.0(3.2)	408(16.0)	384(15.1)	173(6.8)	6.4(14.1)

W-SERIES

TRIENS Ultra Compact

W-SERIES are designed for extreme space-restricted applications. Perfect for under work bench mounting, can be mountend on ceiling or wall.

01 Improved support strength
Strengthened bracket support arms more than twice as previous model.


02 Equipped with SUS protector
Stainless steel protector has been added at hose outlet to extend life of outside casing.



■ Ceiling or Wall mount ■



■ Dimensions ■

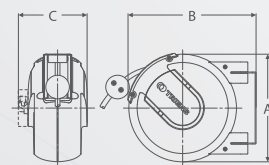

■ AIR HOSE REELS



Air Hose Reel
WHC-206B 6.5mm 6m
•High quality polyurethane hose
•Easy couplings are equipped.

Model	Material	Fitting	Outlet hose ID inch(mm)	m(ft)	bar(psi)	Fitting	Inlet hose m(ft)	Size mm(inch)	Weight kg(lb)
WHC-206B	PU	1/4	1/4(6.5)	6(20)	14(200)	1/4	0.8(2.6)	A B C	2.7(5.9)
WHC-303B	PU	3/8	5/16(8.0)	3(10)	14(200)	3/8	0.8(2.6)	228(9.0) 272(10.8) 146(5.8)	2.8(6.1)

※ Comes with mounting base set

Air Hose Reel
WHC-303B 8.0mm 3m
•High quality polyurethane hose

■ OUTLET CORD REELS



Outlet Cord Reel
WCC-306B 100V 220V 6m
•Compact type triple outlet with a ground clip

Model	Cable standard	Plug type	Outlet cable wire(s)	mm2	Outlet cable m(ft)	V	A	Inlet cable thermostat m(ft)	Size mm(inch)	Weight kg(lb)
WCC-306B	PSE	A/A3	3	1.25	6(20)	125/250	6	○	0.8 (2.6)	228 (8.9) 272 (10.7) 147 (5.7)
	VDE	E/EF	3	1.5						
	CCC	A/C/ACI	3	1.5						
	SJTOW	B	3	1.5						

※ Comes with mounting base set

■ CONTROL SWITCH REEL




Control Switch Reel
WPC-406B 4 cores 6m

Model	Cable standard	Plug type	Outlet cable wire(s)	mm2	Outlet cable m(ft)	V	A	Inlet cable thermostat m(ft)	Size mm(inch)	Weight kg(lb)
WPC-406B	PSE/VDE/CCC	-	4	2	6(20)	125/250	6	-	0.8 (2.6)	228 (8.9) 272 (10.7) 147 (5.7)

※ Comes with mounting base set


UNIT REEL

Basic combination reels



01 Hose Life Extension


Stainless steel hose/cable guides eliminates the damage on the cover and extend the life of the product.




02 Mounting Bracket

Comes Complete with a slide-in mounting bracket, an inlet hose and a cable.

■ Dimensions ■

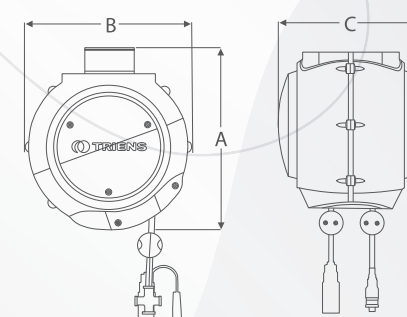

■ Mounting bracket dimensions ■

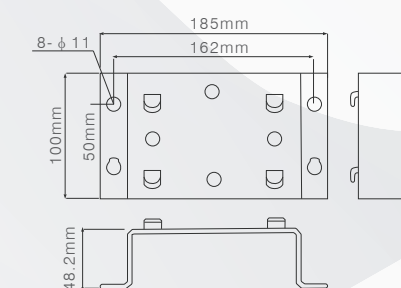

■ UNIT REEL

● AIR HOSE REELS ● OUTLET CORD REELS

Model	Hose	Outlet hose / Cable ID inch(mm)	m(ft)	Fitting / Plug	Outlet hose / Cable Bar(psi) / Power rating	Inlet hose / Cable Fitting / Plug	m(ft)	Weight Kg(lb)	Size mm (inch)
UN-A2-C	AIR	6.5	10(35)	1/4	14(200)	1/4	0.8(2.6)	9.1(20)	368(14.49) 337(13.27) 288(11.40)
	CABLE	1.25 x 3 wires 1.5 x 3 wires	10(35)	A/A3 E/EF A/C/ACI B	A/C 125/250 V , 6A	A E G B	0.8(2.6)		
UN-A3-C	AIR	8.0	10(35)	3/8	14(200)	3/8	0.8(2.6)	9.1(20)	368(14.49) 337(13.27) 288(11.40)
	CABLE	1.25 x 3 wires 1.5 x 3 wires	10(35)	A/A3 E/EF A/C/ACI B	A/C 125/250 V , 6A	A E G B	0.8(2.6)		
UN-A2-A2	AIR	6.5	10(35)	1/4	14(200)	1/4	0.8(2.6)	8.6(19)	368(14.49) 337(13.27) 288(11.40)
	AIR	6.5	10(35)	1/4	14(200)	1/4	0.8(2.6)		
UN-A3-A3	AIR	8.0	10(35)	3/8	14(200)	3/8	0.8(2.6)	8.6(19)	368(14.49) 337(13.27) 288(11.40)
	AIR	8.0	10(35)	3/8	14(200)	3/8	0.8(2.6)		

● G-SERIES ●

Dual Pedestal Heavy Duty series




Dual pedestal for heavy duty applications. Handles wide range of fluid. Comes with slide in mounting base. Arm is adjustable for 5 different positions.

Reel can be adjusted 5 different positions

Color option is available



● WHITE COLOUR

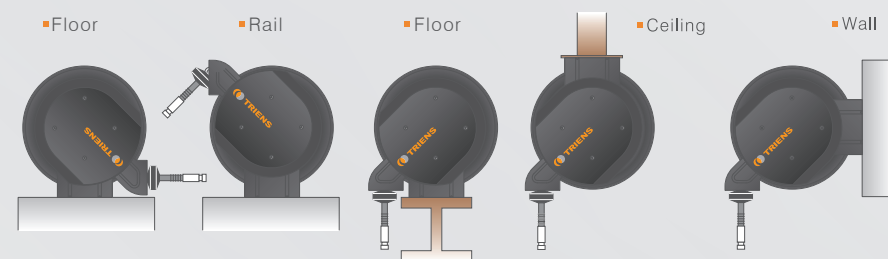

Dimensions

	A	B	C
GS	461 (18.1)	447 (17.5)	245 (9.6)
GM	566 (22.2)	551 (21.6)	245 (9.6)

mm(inch)

■ G SERIES SMALL

● AIR HOSE REELS ● WATER REELS ● OIL REELS ● GREASE REELS



	Model	Material	Fitting	outlet hose ID inch(mm)	m(ft)	bar(psi)	inlet hose Fitting	m(ft)	weight kg(lb)
AIR	GS I A-315	PVC	3/8	5/16(8.0)	15(50)	14(200)	3/8	1.0(3.2)	13.5(29.7)
	GS I A-410	PVC	1/2	1/2(12.7)	10(35)	14(200)	1/2	1.0(3.2)	14.9(32.8)
WATER	GS I W-315	PVC	3/8	5/16(8.0)	15(50)	20(300)	3/8	1.0(3.2)	13.5(29.7)
	GS I W-410	PVC	1/2	1/2(12.7)	10(35)	20(300)	1/2	1.0(3.2)	14.9(32.8)
OIL	GS I O-310	1 braid	3/8	3/8(9.5)	10(35)	140(2000)	3/8	1.0(3.2)	15.7(34.6)
	GS I O-315	1 braid	3/8	3/8(9.5)	15(50)	140(2000)	3/8	1.0(3.2)	16.9(37.2)
	GS I O-410	1 braid	1/2	1/2(12.7)	10(35)	140(2000)	1/2	1.0(3.2)	16.8(37.2)
	GS I O-415	1 braid	1/2	1/2(12.7)	15(50)	140(2000)	1/2	1.0(3.2)	18.6(41.1)
GREASE	GS I G-210	2 braid	1/4	1/4(6.5)	10(35)	280(4000)	1/4	1.0(3.2)	15.8(34.8)
	GS I G-215	2 braid	1/4	1/4(6.5)	15(50)	280(4000)	1/4	1.0(3.2)	17.8(39.2)
	GS I G-310	2 braid	3/8	3/8(9.5)	10(35)	280(4000)	3/8	1.0(3.2)	17.7(39.2)

※ Comes with inlet hose ,nipple and mounting base set.

■ G SERIES MEDIUM


● AIR HOSE REELS ● WATER REELS ● OIL REELS ● GREASE REELS




	Model	Material	Fitting	outlet hose ID inch(mm)	m(ft)	bar(psi)	inlet hose Fitting	m(ft)	weight kg(lb)
AIR	GM I A-320	PVC	3/8	5/16(8.0)	20(65)	14(200)	3/8	1.0(3.2)	16.9(37.2)
	GM I A-325	PVC	3/8	5/16(8.0)	25(80)	14(200)	3/8	1.0(3.2)	17.4(38.3)
	GM I A-330	PVC	3/8	5/16(8.0)	30(100)	14(200)	3/8	1.0(3.2)	17.9(39.4)
	GM I A-420	PVC	1/2	1/2(12.7)	20(65)	14(200)	1/2	1.0(3.2)	18.8(41.4)
WATER	GM I W-320	PVC	3/8	5/16(8.0)	20(65)	20(300)	3/8	1.0(3.2)	16.9(37.2)
	GM I W-325	PVC	3/8	5/16(8.0)	25(80)	20(300)	3/8	1.0(3.2)	17.4(38.3)
	GM I W-330	PVC	3/8	5/16(8.0)	30(100)	20(300)	3/8	1.0(3.2)	17.9(39.4)
	GM I W-420	PVC	1/2	1/2(12.7)	20(65)	20(300)	1/2	1.0(3.2)	18.8(41.4)
OIL	GM I O-320	1 braid	3/8	3/8(9.5)	20(65)	140(2000)	3/8	1.0(3.2)	22.4(49.3)
	GM I O-420	1 braid	1/2	1/2(12.7)	20(65)	140(2000)	1/2	1.0(3.2)	33.8(74.5)
GREASE	GM I G-220	2 braid	1/4	1/4(6.5)	20(65)	280(4000)	1/4	1.0(3.2)	22.5(49.6)
	GM I G-315	2 braid	3/8	3/8(9.5)	15(50)	280(4000)	3/8	1.0(3.2)	23.8(52.4)

※ Comes with inlet hose ,nipple and mounting base set.

■ Mounting bracket dimensions

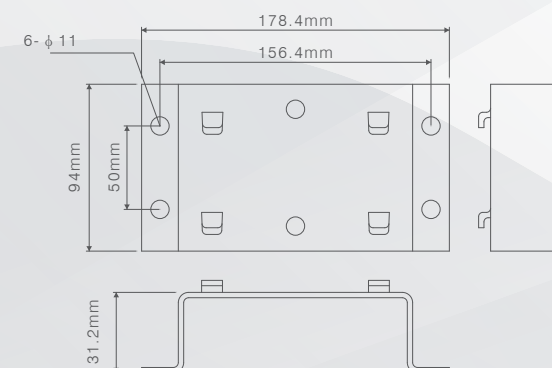

■ Installation example

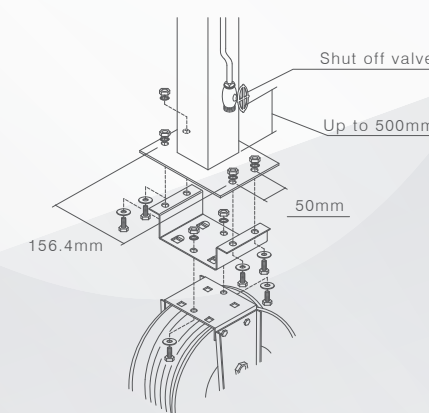

M-SERIES


Premium Heavy Duty series




01 More Tough , Less weight
Brand new dual pedestal & drum stands greatly for heavy duty application.

02 More smooth , More durable
Newly designed axle & swivel structure ensures smooth handling and extend the life of product


Reel can be adjusted 5 different positions

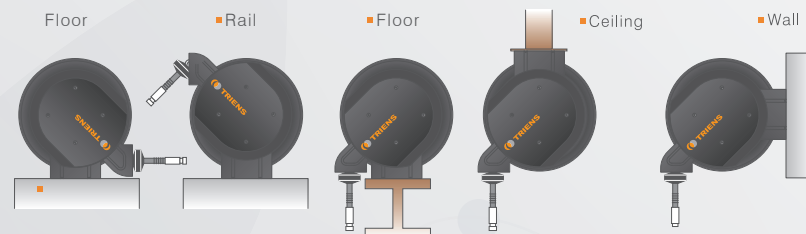

Dimensions

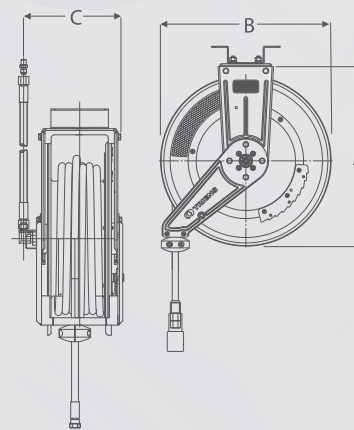

Mounting bracket dimensions

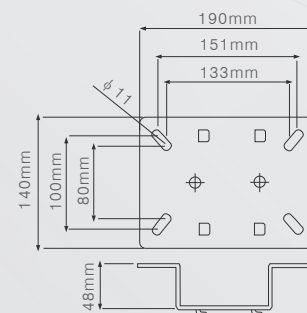

M SERIES

AIR HOSE REELS OIL REELS GREASE REELS

	Model	Material	Fitting	Outlet hose			Inlet hose		weight	Size mm (inch)		
				ID inch(mm)	m(ft)	bar(psi)	Fitting	m(ft)	kg(lb)	A	B	C
AIR	MMA-315	PVC	3/8	3/8(9.5)	15(50)	14(200)	3/8	1.0(3.2)	16.0(35.2)	502(19.7)	471(18.5)	226(8.9)
	MMA-415	PVC	1/2	1/2(12.7)	15(50)	14(200)	1/2	1.0(3.2)	17.5(38.5)			
OIL	MMO-315	1 braid	3/8	3/8(9.5)	15(50)	140(2000)	3/8	1.0(3.2)	19.9(43.8)			
	MMO-415	1 braid	1/2	1/2(12.7)	15(50)	140(2000)	1/2	1.0(3.2)	21.9(48.2)			
GREASE	MMG-315	2 braid	3/8	3/8(9.5)	15(50)	280(4000)	3/8	1.0(3.2)	22.6(49.8)			

※ Comes with inlet hose , nipple and mounting base set

E-SERIES

Enclosed Heavy Duty Hose Reels

E SERIES SMALL

AIR HOSE REELS WATER REELS OIL REELS GREASE REELS



	Model	Material	Fitting	Outlet hose			Inlet hose		weight
				ID inch(mm)	m(ft)	bar(psi)	Fitting	m(ft)	kg(lb)
AIR	ESA-315	PVC	3/8	3/8(9.5)	15(50)	14(200)	3/8	1.0(3.2)	17.4(38.3)
	ESA-410	PVC	1/2	1/2(12.7)	10(35)	14(200)	1/2	1.0(3.2)	18.8(41.4)
WATER	ESW-315	PVC	3/8	3/8(9.5)	15(50)	20(300)	3/8	1.0(3.2)	17.4(38.3)
	ESW-410	PVC	1/2	1/2(12.7)	10(35)	20(300)	1/2	1.0(3.2)	18.8(41.4)
OIL	ESO-310	1 braid	3/8	3/8(9.5)	10(35)	140(2000)	3/8	1.0(3.2)	19.6(43.2)
	ESO-410	1 braid	1/2	1/2(12.7)	10(35)	140(2000)	1/2	1.0(3.2)	20.7(45.6)
	ESO-315	1 braid	1/2	1/2(12.7)	15(50)	140(2000)	1/2	1.0(3.2)	20.8(45.8)
	ESO-415	1 braid	1/2	1/2(12.7)	15(50)	140(2000)	1/2	1.0(3.2)	22.5(49.6)
GREASE	ESG-210	2 braid	1/4	1/4(6.5)	10(35)	280(4000)	1/4	1.0(3.2)	19.7(43.4)
	ESG-215	2 braid	1/4	1/4(6.5)	15(50)	280(4000)	1/4	1.0(3.2)	21.7(47.8)
	ESG-310	2 briad	3/8	3/8(9.5)	10(35)	280(4000)	3/8	1.0(3.2)	21.6(47.6)

※ Comes with inlet hose , nipple and mounting base set

E SERIES LARGE


AIR HOSE REELS WATER REELS OIL REELS GREASE REELS



	Model	Material	Fitting	Outlet hose			Inlet hose		weight
				ID inch(mm)	m(ft)	bar(psi)	Fitting	m(ft)	kg(lb)
AIR	ELA-320	PVC	3/8	3/8(9.5)	20(65)	14(200)	3/8	1.0(3.2)	24.6(54.3)
	ELA-325	PVC	3/8	3/8(9.5)	25(80)	14(200)	3/8	1.0(3.2)	25.1(55.3)
	ELA-330	PVC	3/8	3/8(9.5)	30(100)	14(200)	3/8	1.0(3.2)	25.6(56.4)
	ELA-420	PVC	1/2	1/2(12.7)	20(65)	14(200)	1/2	1.0(3.2)	29.6(65.2)
WATER	ELW-320	PVC	3/8	3/8(9.5)	20(65)	20(300)	3/8	1.0(3.2)	24.6(54.3)
	ELW-325	PVC	3/8	3/8(9.5)	25(80)	20(300)	3/8	1.0(3.2)	25.1(55.3)
	ELW-330	PVC	3/8	3/8(9.5)	30(100)	20(300)	3/8	1.0(3.2)	25.6(56.4)
	ELW-420	PVC	1/2	1/2(12.7)	20(65)	20(300)	1/2	1.0(3.2)	29.6(65.2)
OIL	ELO-320	1 braid	3/8	3/8(9.5)	20(65)	140(2000)	3/8	1.0(3.2)	29.2(64.3)
	ELO-420	1 braid	1/2	1/2(12.7)	20(65)	140(2000)	1/2	1.0(3.2)	32.9(72.5)
GREASE	ELG-215	2 braid	1/4	1/4(6.5)	15(50)	280(4000)	1/4	1.0(3.2)	26.4(58.2)
	ELG-220	2 braid	1/4	1/4(6.5)	20(65)	280(4000)	1/4	1.0(3.2)	28.4(62.6)
	ELG-315	2 briad	3/8	3/8(9.5)	15(50)	280(4000)	3/8	1.0(3.2)	29.1(64.1)

※ Comes with inlet hose , nipple and mounting base set

Dimensions

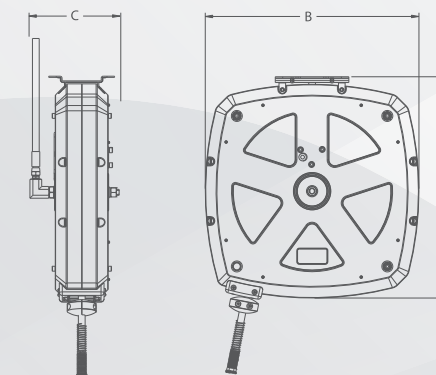


	A	B	C
ES	508 (20)	488 (19.3)	206 (8.2)
EL	595 (23.5)	575 (22.7)	235 (9.3)


mm(inch)

Installing support

Fixed bracket




Swiveling bracket(Optional)

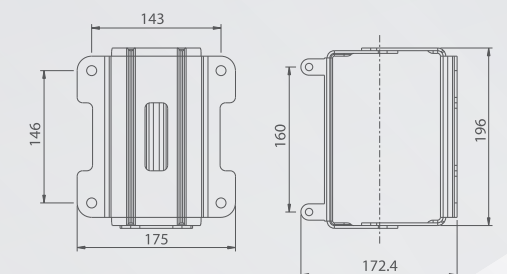

● O-SERIES ●

Maximum flow, light pull-out torque

■ OXY-ACETYLENE

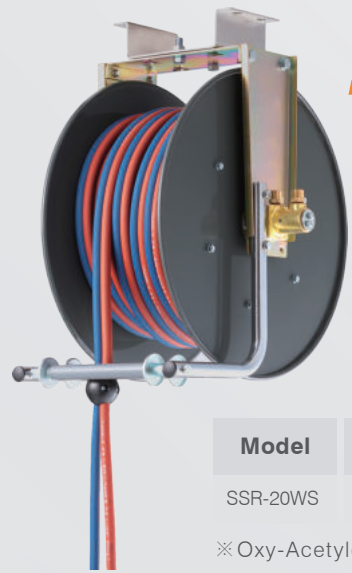


Twin Gas Hose Reel

SSR-20WS

50 mm 20m

■ Ceiling or Wall mount ■

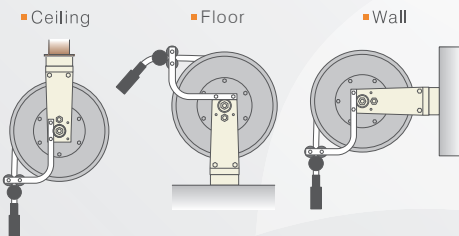

Model	outlet hose			Inlet hose		Size mm(inch)			weight kg(lb)
	Material	ID inch(mm)	m(ft)	bar(psi)	Fitting	A	B	C	
SSR-20WS	Rubber	5.00	20(65)	7(100)	-	410(16.1)	390(15.3)	300(11.8)	15.8(34.8)

※ Oxy-Acetylene reel doesn't include inlet hose ※ Outlet hose have no fittings at the hose end

● H-SERIES ●

Hand Crank Hose Reel Series



■ HS4-60 ■
(Square base)




■ HT4-60 ■
(Triangle base)


Ideal for turf care, pest control or industrial use.
Full-flow hollowed shaft allows constant flow all the time.

- Dual bearing for smooth handling.
- Hand adjustable drag brake to prevent back rush.
- Heavy duty lock pin to prevent spool rotation when not in use.

■ Dimensions (Square base) ■

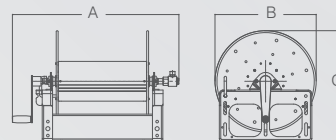

■ Dimensions (Triangle base) ■

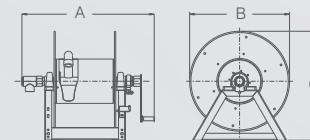

Model	Outlet			Inlet Fitting	Size mm(inch)			weight kg(lb)
	Fitting	m(ft)	bar(psi)		A	B	C	
HS4-60	1/2	60(200)	200(3000)	1/2	729(28.7)	420(16.5)	457(17.9)	20.8(45.8)
HS4-100	1/2	100(325)	200(3000)	1/2	932(36.6)	420(16.5)	457(17.9)	43(94.7)
HT4-60	1/2	60(200)	200(3000)	1/2	729(28.7)	420(16.5)	457(17.9)	18.7(41.2)
HT4-100	1/2	100(325)	200(3000)	1/2	932(36.6)	420(16.5)	457(17.9)	37(81.5)

※ H-series reels comes without outlet / inlet hose. Please consult with Factory for pre-installed hose.

● TWIN·KLE2 ●

TRIENS original combination reel

Reel Combinations

can be mixed or matched to meet your requirements. Various combination is available

Practical & Convenient


Reel cover can be easily removed for hose exchange and maintenance of reel.



■ Available color options ■



■ Dimensions ■

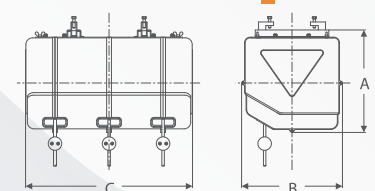

■ TWIN·KLE 2

● AIR HOSE REELS ● WATER REELS ● OUTLET CORD REELS ● CABLE REELS

	Model	Outlet hose			Inlet hose			weight kg(lb)
		Material	Fitting	ID inch(mm)	m(ft)	bar(psi)	Fitting	
AIR AIR WATER	TR2-A	PU	1/4	1/4(6.5)	10(35)	14(200)	1/4	4.2(9.2)
	TR2-A310	PU	3/8	5/16(8.0)	10(35)	14(200)	3/8	4.6(10.1)
	TR2-W	PVC	1/4	1/4(6.5)	10(35)	20(300)	1/4	4.4(9.7)
	Model	Outlet hose			Outlet Cable			weight kg(lb)
		Cable standard	Plug type	wire(s)	mm2 (AWG)	m(ft)	V A thermostat	
CABLE	TR2-C	PSE	A/A3		1.25			
		VDE	E/EF	3	1.5	10(35)	125/250	6
		CCC	A/C/ACI		1.5			
		SJTOW	B		1.25 (16)			
CABLE	TR2-CL	PSE	Hang light		1.25			
		VDE	CL-18	3	1.5	10(35)	125/250	6
		CCC			1.5			
		SJTOW			1.25 (16)			
CABLE	TR2-D	PSE	Hang light		1.25			
		VDE	CL-18LED	3	1.5	10(35)	125/250	6
		CCC			1.5			
		SJTOW			1.25 (16)			
CABLE CABLE	TR2-3NL	PSE/VDE/CCC	-	3	1.25	8(25)	125/250	6
	TR2-4NL	PSE/VDE/CCC	-	4	2	8(25)	125/250	6

■ Combination example ■

Model	Combination	
TR2-A-CL	Air (1/4) + Captain light	2 Unit
TR2-A310-CL	Air (3/8) + Captain light	3 Unit
TR2-A-CL-A	Air (1/4) + Captain light + Air(1/4)	3 Unit
TR2-A310-C-3NL	Air (3/8) + Outlet + Cable(3wire)	3 Unit
TR2-A-C-W-4NL	Air (1/4) + Outlet + Water + Cable(4wire)	4 Unit

※ Please consult with factory for other combinations you may require

■ Dimensions ■

	A	B	C	Cover Weight
1	355.0 (13.9)	336 (13.2)	196 (7.7)	2.4 (5.2)
2	342 (13.4)	336 (13.2)	376 (14.8)	4.0 (8.8)
3	342 (13.4)	336 (13.2)	556 (21.8)	5.7 (12.5)

mm(inch)

REEL BOX

Multiple reel storage cabinets



01 Combination is customizable
Reel combinations can be mixed or matched to meet your requirements.

02 Custom logo option
Can be customized logo for each customer. Provides eye-catching visual impact for the workplace.

03 Custom Paint option
Can be customized color, logo for each customer.



※ Inside reel, switch box and logo mark are optional.

EASY MAINTENANCE TYPE



Reel Box **SBN-3** 3 unit

Reel Box **SBN-2** 2 unit

Removable cover for easy maintenance and reel exchange.

BOAT SHAPE



Lumi-pack Boat Shape **SB-3P** 3 unit

A clean design with a white metal cover

Lumi-pack Boat Shape **SB-2P** 2 unit

A clean design with a white metal cover

ROUND SHAPE



Lumi-pack round shape **SB-3** 3 unit

Provides an eye-catching visual impact for the workplace.

Lumi-pack round shape **SB-2** 2 unit

With light up unit

※ The above models are only of box type. Please specify the models that you would like to store in the box when you order.

Model	Size mm(inch)			weight kg(lb)
	A	B	C	
SBN-2 Reel Box (Easy maintenance type)	430(16.9)	370(14.5)	440(17.3)	9.5(20.9)
SBN-3 Reel Box (Easy maintenance type)	430(16.9)	370(14.5)	621(24.4)	12(26.4)
SB-2 Lumi-Pack (round shape)	437(17.2)	525(20.6)	725(28.5)	12.3(27.1)
SB-3 Lumi-Pack (round shape)	437(17.2)	525(20.6)	868(34.1)	14.6(32.1)
SB-2P Lumi-Pack (boat shape)	380(14.9)	370(14.5)	385(15.1)	9(19.8)
SB-3P Lumi-Pack (boat shape)	380(14.9)	370(14.5)	565(22.2)	12.1(26.6)

※ Comes with installation bracket

SBB-SERIES

Brand new combined reel box



SBB REEL BOX

stores multiple reels to meet customer's requirements. Great for corporate logo placement. Number of reels can be customizable.

CUSTOM LOGO OPTION




Can be customized logo for each customer.

※ Inside reel, switch box and logo mark are optional.

Model description

- No back light type
SBB-SS / S / L
Number of reels
- Back light type
SBB-SSi / Si / Li
Number of reels

Dimensions

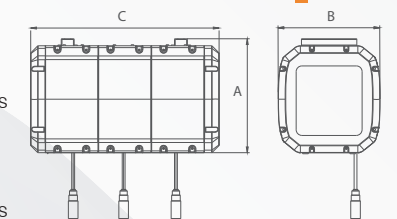

REEL BOX SBB-SS



Reel BOX **SBB-SS**

Compatible reels :
S series Small size reels

Model	Size mm(inch)			weight kg(lb)
	A	B	C	
SBB-1SS	397(15.6)	355(13.9)	287(11.2)	8.5(18.7)
SBB-2SS	397(15.6)	355(13.9)	472(18.5)	9.3(20.5)
SBB-3SS	397(15.6)	355(13.9)	657(25.8)	10.2(22.4)
SBB-4SS	397(15.6)	355(13.9)	842(33.1)	11.2(24.6)

[Accessory] Installation clamp/ Screw for fixing installation clamp
※ Weight shown is just for box, not including inside reels.

REEL BOX SBB-S



Reel BOX **SBB-S**

Compatible reels :
S series Small size reels
S series Medium size reels
G series Small size reels

Model	Size mm(inch)			weight kg(lb)
	A	B	C	
SBB-1S	493(19.4)	453(17.8)	402(15.8)	20.9(46)
SBB-2S	493(19.4)	453(17.8)	702(27.6)	30.3(66.8)
SBB-3S	493(19.4)	453(17.8)	1002(39.4)	39.7(87.5)
SBB-4S	493(19.4)	453(17.8)	1302(51.2)	49.2(108.4)

[Accessory] Installation clamp/ Screw for fixing installation clamp
※ Weight shown is just for box, not including inside reels.

REEL BOX SBB-L



Reel BOX **SBB-L**

Compatible reels :
S series Small size reels
S series Medium size reels
G series Small size reels
G series Medium size reels

Model	Size mm(inch)			weight kg(lb)
	A	B	C	
SBB-1L	693(27.2)	560(22)	402(15.8)	24(52.9)
SBB-2L	693(27.2)	560(22)	702(27.6)	34.5(76)
SBB-3L	693(27.2)	560(22)	1002(39.4)	45(99.2)
SBB-4L	693(27.2)	560(22)	1302(51.2)	55.5(122.3)

[Accessory] Installation clamp/ Screw for fixing installation clamp
※ Weight shown is just for box, not including inside reels.

ACCESSORIES

Car Washing Accessories

■ PRESSURE WASHER



Pressure washer

SX-1512-C

380V 50HZ 3KW 3PHASE

Pressure washer

SX-1508-C

220V 50HZ 2.2KW 1PHASE

Intake Pressure	Intake Flow rate	Spray pressure	Working spray pressure
2-5 bar	0-20L/min	140 bar	10 bar

Water flow rate	Working temperature	weight kg(lb)	Dimension
0-15 L/Min	5-50 °C	45	550 x 450 x 400

■ standard pressure gun:SWQ-G02 and 5m pressure water hose

■ HIGH PRESSURE WATER NOZZLE



High Pressure Water Nozzle

SWQ-G01

Housing material	Working pressure	Max temperature	Inlet end joint thread	Water spray state
• Engineering plastics • Valve core • Joints are copper	150 bar	60 °C	M18 * 1.5 (with special turn Joint)	fog + column conversion

- The shape of the water outlet can be adjustable to fan shape or straight shape
- A wide range of applications, municipal roads, vehicle, landscaping and other application to clean.

High Pressure Water Nozzle

SWQ-G02

Housing material	Working pressure	Max temperature	Inlet end joint thread	Water spray state
• High-strength engineering plastics • Valve core • Joints are copper	345 bar	60 °C	M18 * 1.6 (with special adapter)	-

- Outlet nozzle is replaceable

■ OTHERS

● INTERIOR CLEANING NOZZLE ● AIR WATER PRESSURE NOZZLE ● WATER AND FOAM NOZZLE



Air-water pressure nozzle

SDQ-2010

Housing material	Air intake pressure	Water intake pressure	weight kg(lb)	Dimension
Metal,plastic	5.5-8.5 bar	2.5-6.5 bar	0.8	220 x 185 x 36

- Use tap-waterpressure with compressed air to spray high pressure water.



Water and foam nozzle

SWQ-0300TD

Housing material	Inlet air pressure	Outlet water pressure
Steel,plastic	4-8 bar	up to 3 bar



Interior cleaning nozzle with tank

SWQ-0200

Housing material	Air pressure	Capacity
Metal,plastic	4-8 bar	1,000 ml

ACCESSORIES

Car Washing Accessories

■ OTHERS

● COATING NOZZLE ● ENGINE CLEANING NOZZLE ● AIR NOZZLE ● FOAM NOZZLE WITH TANK



Foam nozzle with tank

SWQ-0300

Components	Inlet air pressure	Tank capacity
Steel,plastic	4-8 bar	1,000 ml

- This product makes the foam more abundant, more delicate and even, and the distance is farther, which greatly saves consumables. Novel design, low cost and high efficiency, easy to move, ideal for 4S stations, car wash shops, repair shops, automotive surfaces, factory machinery and equipment



Coating nozzle

SWQ-0400

Components	Inlet air pressure	Outlet air volume
Steel,plastic	6-9 bar	200L/min

- Used for automotive rubber glazing, leather seat glazing, engine coating, tire coating, easy to use, easy to spray evenly.



Engine cleaning nozzle

SWQ-0500

Components	Inlet air pressure	Tank Capacity
Steel,plastic	4-8 bar	1000 ml

- This product is used to a dead corner of the car engine, chassis and other areas difficult to clean
- Nozzle head is equipped with a 600mm long universal angle adjustment direction tube to clean the stubble stains on the surface of the car body
- It is convenient and quick to use, and the set pressure is kept at 7 kg.
- The cleaning effect can be optimized. (neutral liquid soap)



Air Nozzle

SWQ-Q180

Components	Working pressure	Noise
• High quality POM injection molding • Corrosion resistance • Wear resistance	1-16 bar	75 decibels

- Corrosion and wear resistant

■ WATER NOZZLE



Water Nozzle

SWQ-S280

Description
• Water nozzle with good sealing and pressure resistance. • Aesthetic and corrosion resistant. • Fan-shaped water spray, saving liquid and high efficiency.




Water Nozzle

WG-3

Description
• Water nozzle with good sealing and pressure resistance. • Aesthetic and corrosion resistant. • Fan-shaped water spray, saving liquid and high efficiency.

■ OUTLET PLUG SELECTION

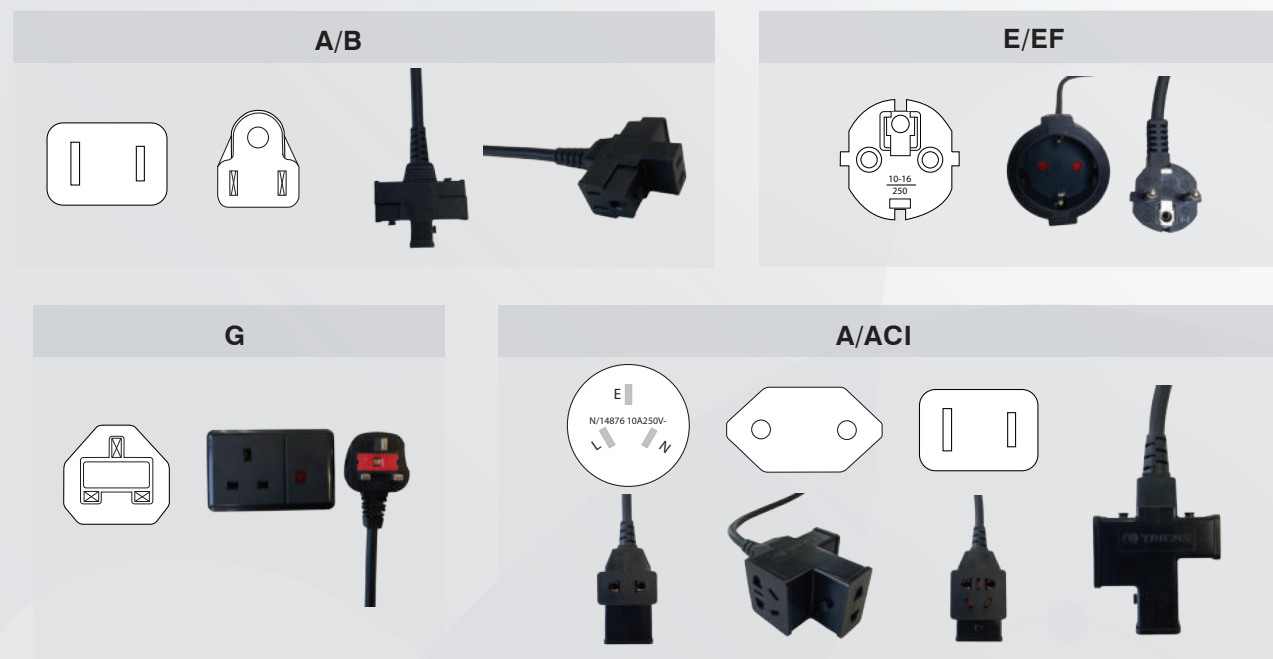

■ HOSE SELECTION



PU Hose

Fluid: Air
Max pressure: 14 bar (200PSI)
Light weight, flexible, easy to handle



PVC Hose

Fluid: Air / Water
Max Pressure: 20 bar (300PSI)
Good resistance against chemical
Good resistance against oxidation and UV(sunlight)



Steel braid rubber

Fluid: Air / Water/ Oil /Grease
Max pressure: 140 bar (2000PSI) by single braid 280 bar (4000PSI) by double braid reinforced by steel braid for application of oil / high pressure water / grease dispensing.

■ FITTING SELECTION

● AIR

ISO(BSP)



NPT



● OIL/GREASE

ISO(BSP)



NPT



■ DIGITAL METER



■ T102112

Digital oil meter with trigger handle and 90° non drip nozzle

Connection: 1/2" BSP Female
Max pressure: 80 bar
Flow rate: 40L /m
Temperature: -10 to +50 °C
Accuracy: ±0.2%

■ ELECTRONIC PRESET METER



■ E-PRESET

Preset oil meter with trigger handle and 90° manual non drip

of preset: 4
(incl. previous dispense memory)
Connection: 1/2" BSP Female
Max pressure: 80 bar
Flow rate: 40L /m
Temperature: -10 to +50 °C
Accuracy: ±0.2%

■ ACCESSORIES



■ OG36050

Wall Non Drip Unit
Size: 70 X 18 X 155 Mm
Weight: 2 kg



■ 7324

Oil Jug
5 liters



■ KL460

Heavy Duty Grease Gun complete
Weight: 2 kg



■ 26CR

Water Gun
Connection: 3/8 BSP(F)

ACCESSORIES



OM52000

Drum Trolley (180-200kg)
Size: 1000 X 800 X 1200 mm
Weight: 10 Kg



JL4112

Drum Trolley (60 kg)
Size: 600x600x1200 mm
Weight: 5 Kg



K490C

Hand Lever Oil Pump
Size: 100 X 150 X 800 mm
Weight: 2 kg

PNEUMATIC OIL PUMP



OP31027

Pneumatic Oil Pump 3:1
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 1/4" BSP
Flow rate : 20 L/Min
Oil Inlet : 1" F
Oil Outlet: 1/2" F
Weight: 5 kg
Noise Level: 81 db



OP51027

Pneumatic Oil Pump 5:1
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 1/4" F
Flow rate : 18 L/Min
Oil Inlet : 1" F
Oil Outlet: 3/4" F
Weight: 5 kg
Noise Level 81 db
Stubby Type - 270 mm



OP11527

Stainless steel Pneumatic pump 1:1
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 1/4"bsp
Flow rate : 23 L/Min
Oil Inlet : 3/4" BSP
Oil Outlet: 1/2" BSP
Weight: 5,1 kg
Noise Level: 81 DB



F30

Heavy Duty Oil Pneumatic pump 5:1
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 3/8" BSP
Flow rate : 40 L/Min
Oil Inlet : 1" BSP
Oil Outlet: 3/4" BSP
Weight: 4 kg
Noise Level: 85 db
Stubby Type - 270 mm



31S4

Air regulator
Inlet: 1/4" BSP
Outlet: 1/4" BSP
Adjustable range: 1,5 - 10 Bar



17 E/8

Quick Connector
Barb size: 8 mm

GREASE COMPLETE UNIT



GM55030

Grease Complete Unit for 25 / 30 kg
Include: 30,- Kg Trolley,
Grease nozzle, Z-swivel,
Discharge hose, Pump,
cover plate, follower plate
Discharge hose: 2m



GM55060

Grease Complete Unit for 55 / 60 kg
Include: 60,- Kg Trolley,
Grease nozzle, Z-swivel,
Discharge hose, Pump,
cover plate, follower plate
Discharge hose: 2m



GM55200

Grease Complete Unit for 180 / 200 kg
Include: 200,- Kg Trolley
Grease nozzle, Z-swivel,
Discharge hose, Pump,
cover plate, follower plate
Discharge hose: 2m

WASTE OIL EQUIPMENT



OC40075

Waste Oil Drainer - Suction - 80L
Tank: 80L
Suction bowl: 9L
Working pressure : 0,5 Bar
Max pressure : 0,5 bar
Size: 600 X 600 X 1250 mm
Weight: 27 Kg
2m discharge tube
*Air pressurizing to discharge the oil



OD40275

Waste Oil - Gravity - 80L
Tank: 80L
Working pressure : 0,5 Bar
Max pressure : 1 bar
Size: 600 X 600 X 1300 mm
Weight: 28 Kg
Funnel telescope : Max height 800mm
2m discharge tube
*Air pressurizing to discharge the oil



OC41175

Waste Oil Drainer
Suction and Gravity - 80L
Tank: 80L
Suction bowl: 9L
Working pressure : 0,5 Bar
Max pressure : 1 bar
Size: 600 X 600 X 1200 mm
Weight: 32 Kg
Bowl telescope: 800 mm
2m discharge tube
*Air pressurizing to discharge the oil

PNEUMATIC OIL PUMP



GP50148
Grease Pump 50:1
(480 mm)
For 25/30kg Pail
Tube length: 480mm
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 1/4" bsp
Flow rate : 1500 gr/Min
Grease Outlet: 3/8" bsp
Weight: 6 kg
Noize Level: 80 db

GP50174
Grease Pump 50:1
(740 mm)
For 55/60kg Pail
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 1/4" bsp
Flow rate : 1500 gr/Min
Grease Outlet: 3/8" bsp
Weight: 6 kg
Noize Level: 80 db

GP50194
Grease Pump 50:1
(940 mm)
For 180/200kg Drum
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 1/4" bsp
Flow rate : 1500 gr/Min
Grease Outlet: 3/8" bsp
Weight: 6 kg
Noize Level: 80 db

FOLLOWER PLATE & COVER



FP54290
Follower Plate
290 mm
Weight:2,5 kg

FP54370
Follower Plate
370 mm
Weight:2,8 kg

FP54585
Follower Plate
585 mm
Weight:3 kg



DC52310
Cover
310 mm
Weight:6 kg

DC52385
Cover
385 mm
Weight:6,5 kg


DC52600
Cover
600 mm
Weight:7 kg

DIAPHRAGM PUMP



001221
Diaphragm Pump 1"
Working Pressure: 2-10 bar
Max Pressure: 10 bar
Air Inlet : 3/8" bsp
Flow rate : 180 L/Min
Oil Inlet : 1" BSP
Oil Outlet: 1" BSP
Weight: 14 kg
Noize Level: 85 DB

SYSTEM DIAGRAM

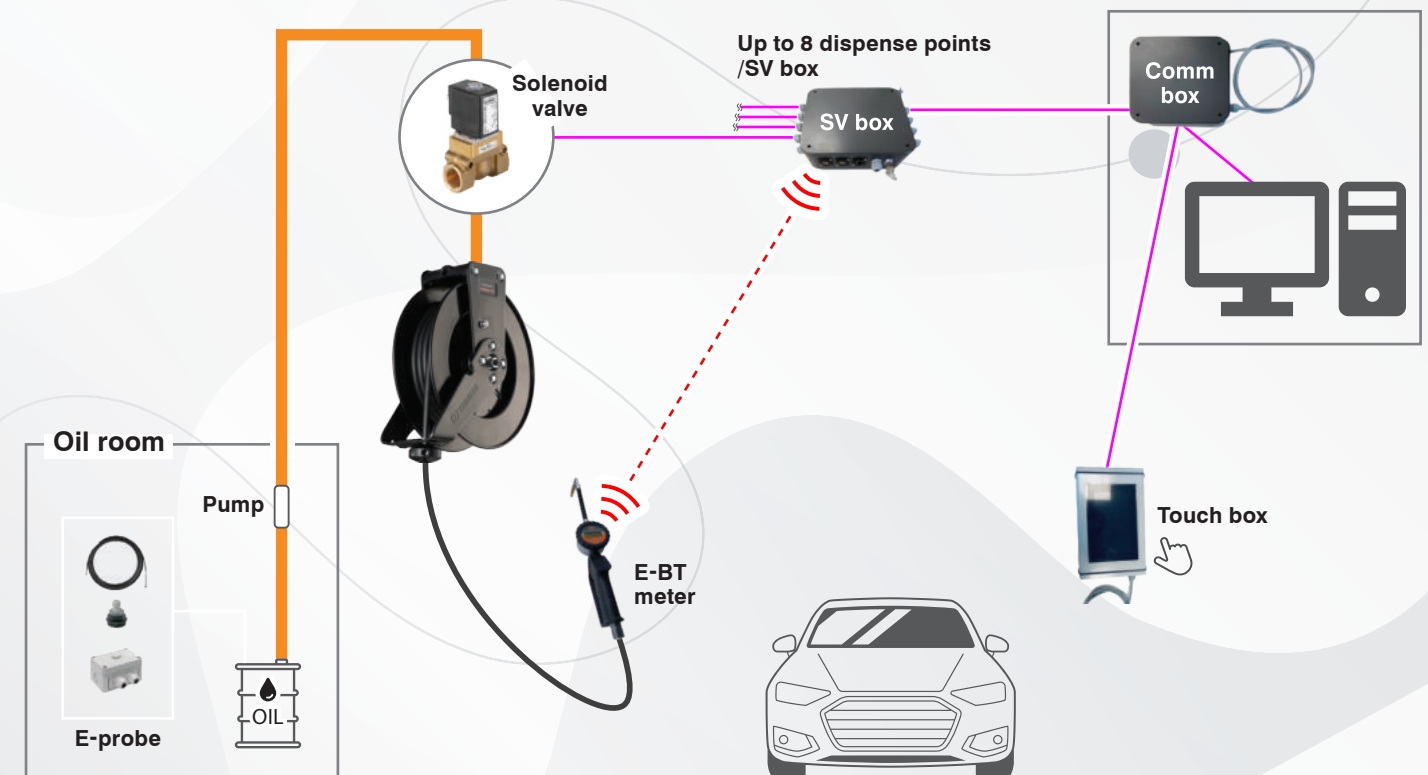

FEATURES

01

No Oil Loss

Full control over the oil consumption. No oil waste due to the traceability of each oil dispense.

02

Operation Quality Management

Control and Monitor all dispenses and real time inventory 100% two-way full ERP data integration

- No inventory discrepancy
- No miss-registration of dispenses.