



Installation instructions



TRIENS Electronic Meter T102112

Material:

To assemble your meter, use a 23 diameter wrench, « Loxeal 58-11 » type sealing glue or teflon tape.

Advice: Liquid sealing glue give a better and stronger result but you can use TEFLON as well



Assembly step:


1. Apply liquid sealant glue like LOXEAL 58-11 to the thread of the hose supplied with the meter for the best result. If you want, you can use TEFLON Tape instead. Don't put both together, this will not work and leakage can appear.



2. Start to tighten the hose manually.



VERY IMPORTANT: You need to hold only the meter body (as shown on the picture), to avoid any damage in the assembly process.

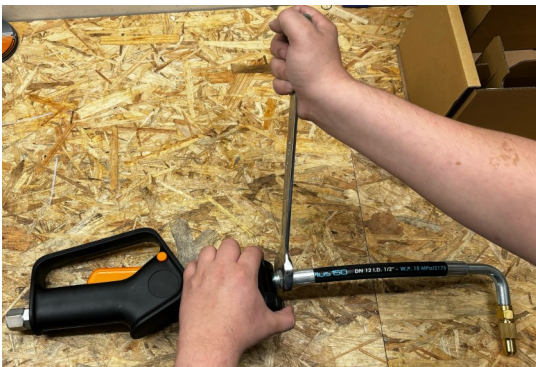

3. Finish tightening it using the wrench (23 mm)